


Loudspeaker

6W Cabinet Loudspeaker

Honeywell's voice alarm cabinet loudspeaker complies with BS5839 part 8 and EN54 part 24.

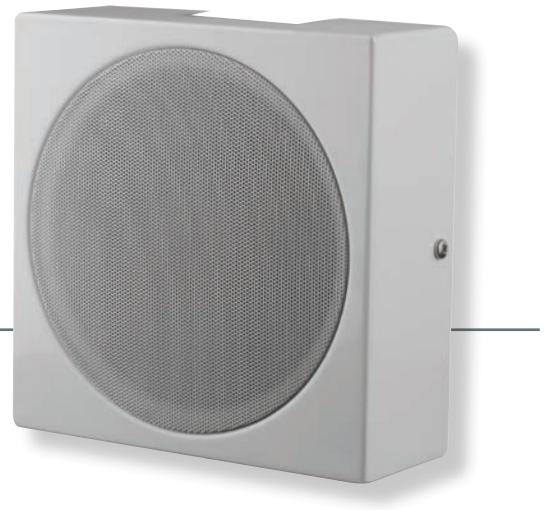


Technical Specifications

SPECIFICATION	
ELECTRICAL	
Max power	9 W
Rated power	6 W
Power taps @ 100V	6 W / 3 W / 1.5 W / 0.75 W
Power taps @ 70V	3 W / 1.5 W / 0.75 W / 0.375 W
SPL at 1W/1M (100Hz - 10KHz)	91 dB
SPL at 6W/1M (100Hz - 10KHz)	98 dB
Frequency range (-10dB)	300 Hz ~ 15 KHz
Rated input voltage	100 V / 70 V
Rated impedance	1.7K Ω / 3.3K Ω / 6.7K Ω / 13K Ω
Connection	Ceramic Terminal
MECHANICAL	
Dimensions	170 mm x 170 mm x 63 mm
Diameter of speaker	4"
Weight	1.56 kg
Front grill color	White (RAL 9003)
Dome color	White (RAL 9003)
Thermal Fuse	150°C


Loudspeaker

6W Cabinet Loudspeaker


Frequency Response

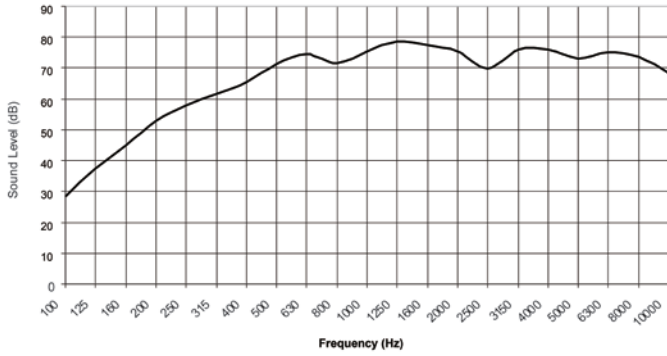


Circuit Diagram

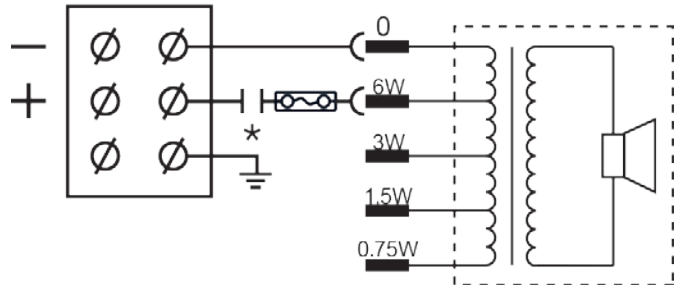


Polar Diagram

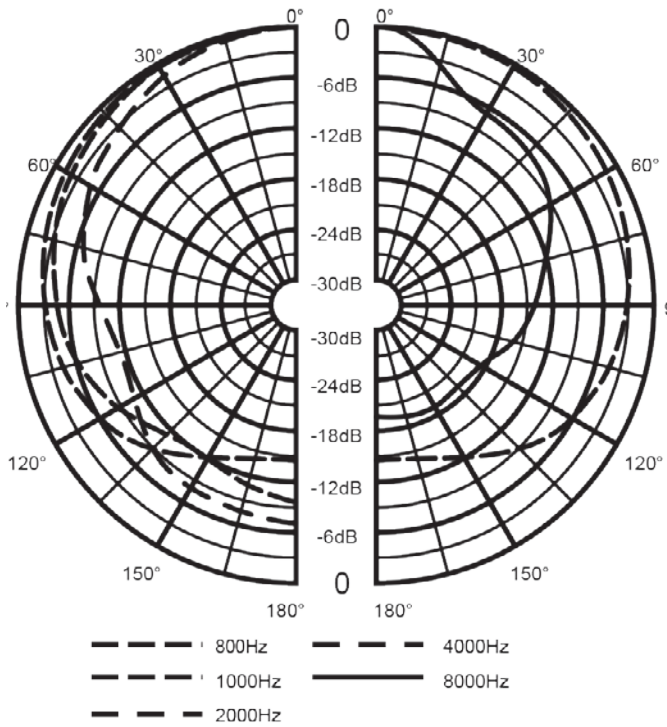

Three-View Diagram

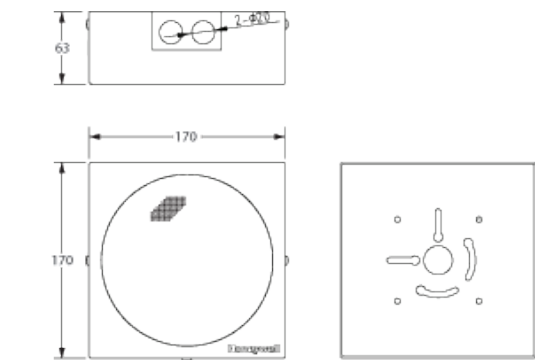

Dimensions in mm

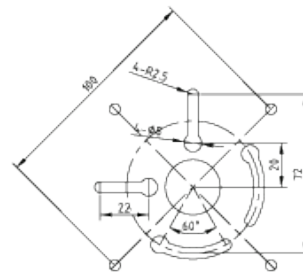

Mounting dimensions in mm

DESCRIPTION

6W Cabinet Loudspeaker

ORDER CODES

582470

Honeywell

Tel: +44 (0) 116 246 2000
 Fax: +44 (0) 116 246 2300
 Email: ukorders@honeywell.com
 140 Waterside Road
 Hamilton Industrial Park
 Leicester
 LE5 1TN

August 2013
 © 2013 Honeywell International Inc.

Honeywell